

Sentry Wall Mounted Tank Alarms with DEF OVERFILL Guards.

- Tank gauge constructed from materials 100% compatible with Diesel Exhaust Fluid (DEF).
- Wall mount tank alarm can be installed up to 350 feet from tank.
- Built-in 103 decibel siren.
- Tank alarm includes a push button test switch.
- Toggle switch to silence the siren.
- Available with battery or with optional 12-volt transformer.
- DEF overfill guard tank gauge has durable silk screen painted graphics.
- Available with field adjustable chain up to 72" (1,828.8 mm).
- Visi-Glo® level indicator clearly displayed in the large glass window.
- Easy to use, adjustable sensor for high or low alarm.

New Monitors and Alarms

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
008668	Audible tank alarm, battery operated, with overfill guard tank gauge with 2" NPS connection	5.5 (2.5)
008669	Audible tank alarm, with 12-volt transformer and overfill guard tank gauge with 2" NPS connection	5.5 (2.5)

Construction

Body	Tank Alarm - Weather resistant ABS Tank Gauge - Large glass housing
Rods	Stainless steel
Fasteners	Stainless steel
Connectors	Acetal
Linkage	Acetal
Float	DEF Compatible Anodized Aluminum
Seals	Flourocarbon
Connections	Tank Alarm - 1/2" Romex Connector Tank Gauge - 2" / 50.8 mm NPS threads




WARNING: Cancer and Reproductive Harm—www.P65Warnings.ca.gov

Sentry Wall Mounted Tank Alarms with DEF OVERFILL Guards.

Dimensions and System Options

Accessories

MODEL NO.	DESCRIPTION
008674	DEF Remote Overfill Guard Sensor

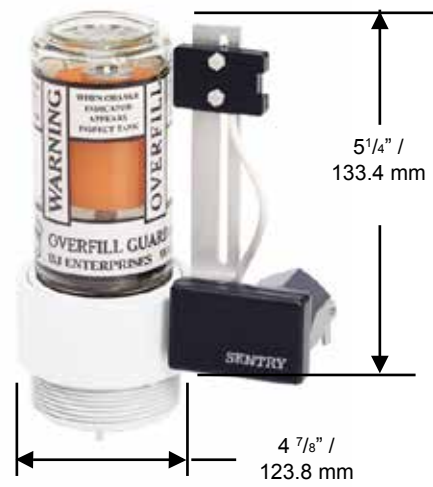

2325 Husky Way • Pacific, MO 63069
 (800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A.