


KEYED REMOTE SOLENOID VALVE

Specifications

12 volt DC
Operating pressure 200 psi
½" NPT ports
Operating temperature 23°-175°

Plumbing

Plumb air supply to solenoid valve observing airflow direction indicated by arrow on valve and assure airline is free of debris and stem is mounted upright. NOTE: It is recommended that a union be installed ahead or behind valve.

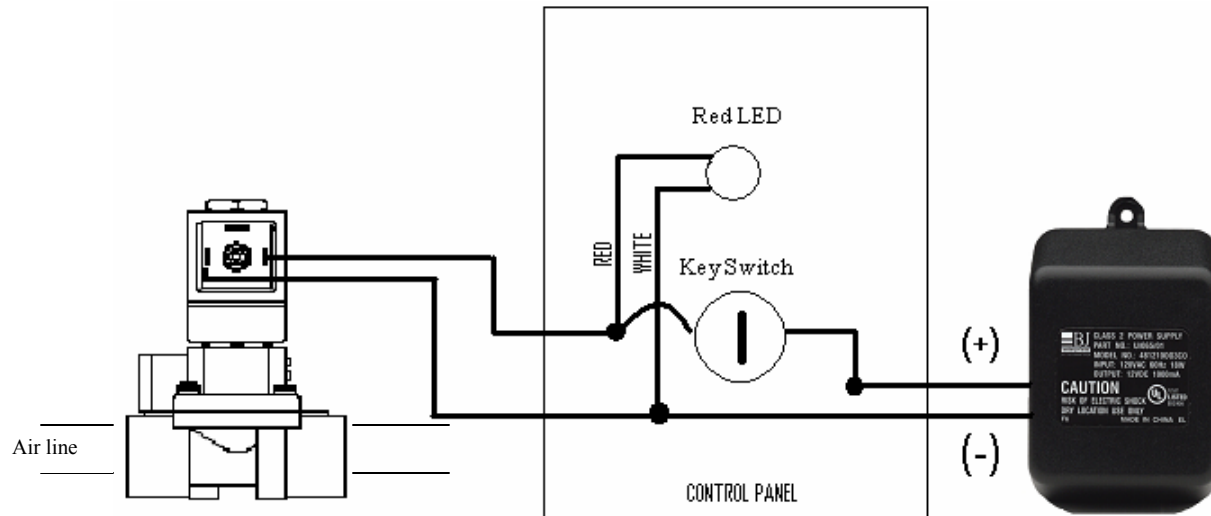

Maximum wire distance from transformer to solenoid valve

18-gauge/2-conductor wire up to 500 feet
16-gauge/2-conductor wire up to 2000 feet

PERIODICALLY TEST UNIT!

Electrical Connections

1. Remove the Philip screw from plastic housing and unplug it from the DIN coil.
2. From the screw opening, use screw to push the terminal block out of the plastic housing.
3. Connect 1 to Positive, 2 to Negative.

