



RED FOX™ High Tank Gauge



485 North Charlotte Avenue
Waynesboro, Virginia 22980 USA
(540) 932-8574
Fax: (540) 932-8594
www.bjenterprisesinc.com

The RED FOX™ Tank Gauge will display how many inches of storage are left until tank is full. The RED FOX™ can be used for tanks up to 99 inches in depth and requires no adjustments. Please follow the instructions carefully to prevent damage to the RED FOX™.

Caution: The RED FOX™ is not recommended or intended to be used in gasoline or highly flammable liquids

Installation Instructions

STOP! Understand instructions before proceeding.

1. Remove cap from end of gauge nipple.
2. Remove tissue paper allowing chain to freefall and assure chain is knot-free.
3. Remove eyelet from end of chain and use to attach float assembly as shown.
See Figure 1.

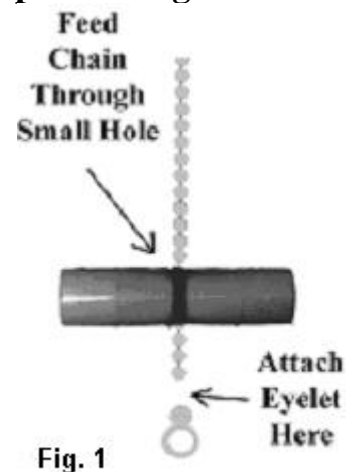


Fig. 1

4. Using plastic loop, completely remove shipping foam insert and discard.
See Figure 2.
5. Assure gauge is functioning properly.
6. Apply Teflon tape or pipe sealant to nipple threads.

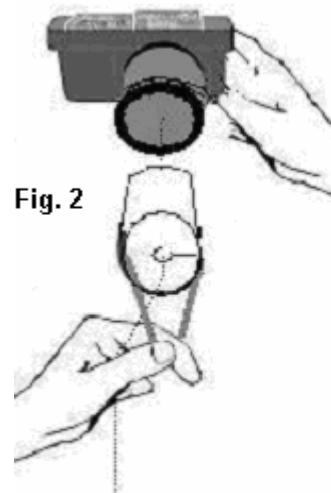


Fig. 2

Continued On Back

7. Insert float assembly into the pre-selected 2-inch NPT tank bung and use the chain to slowly lower the float assembly to its rest position. *See Figure 4.*

Caution: Never let float assembly drop to the bottom. Always use the chain to lower the float assembly. *See Figure 5.*




8. Tighten gauge into tank using a pipe wrench on the nipple only. *See Figure 6.*



Caution: Never use the housing as a wrench. *See Figure 7.*

9. Installation is now complete.



WARRANTY

- Every item is warranted to be in good working order for the original purchaser for one year.
- All freight charges to and from the factory are the responsibility of the user.
- The warranty does not cover: Damages due to malfunctions of equipment; Failure to follow manufacturer's installation, operation or maintenance instructions and guidelines; Unauthorized adjustments, modifications or alterations of the equipment; Replacement of factory parts with parts other than original equipment; Abuse, misuse or negligent acts; Acts of God and or third parties.
- The warranty shall begin on the day the equipment is shipped to the customer. Customers requiring warranty assistance must contact manufacturer for a returned goods authorization number. Manufacturer will determine the method of satisfying the warranty requirements. If it is determined that the product must be returned, proof of purchase and a clear description of the problem must accompany the equipment. The product must be returned freight prepaid. The manufacturer shall not be responsible for any losses (including loss of profits or revenues) incurred by the purchaser during the time necessary to repair the equipment. The manufacturer's sole responsibility shall be to repair or replace the product and not the cost of removal or reinstallation. No other warranty except as stated above is implied or expressed.
- BJ Enterprises will not assume any responsibilities for spills, cleanup, shortages or any other damages resulting from malfunction of this product.